

REGULUS – system Radiators

copper-aluminium water heaters



Ultra lightweight design

Easy to instal

Low water content

Low profile models available

25 years guarantee



The REGULUS-system radiator range is a unique concept in wet system radiators. An aluminium outer case conceals an internal copper pipe heat exchanger which transfers heat to the radiator culminating in a high performance and energy saving heater.

Aluminium conducts heat 4 times quicker than steel which enable our radiators to reach temperature much faster than steel radiators. Additionally the design of the product ensures that the surface area does not get burning hot to touch.

With the benefits of both Convection and Radiant heat you will enjoy added comfort throughout the home. This contemporary designed radiator is suitable for use with all types of boilers: gas, electric, oil, solid fuel and LPG.

Many of the new generation heating solutions such as Air & Ground Heatpumps generate lower system temperatures and as such require larger radiators to provide the same room temperature as traditional heat sources such as Gas and Electric Boilers. The internal design of the REGULUS-system radiators makes them the perfect solution when installed with Heatpump systems.

REGULUS-system radiators are constructed to provide all the benefits offered by low water content appliances as less water within the system adds up to reduced running costs.

These energy efficient radiators use a fifth of the water used by a standard steel panel radiator of the same size. This results in annual energy savings of up to 15%

All REGULUS-system radiators are guaranteed for 25 years



Economical to operate

Energy saving

Choice of thermostatic heads

Rapid heat up times

Suitable for all fuel types

Unique wall mounting kit


UNIQUE CONCEPT - OUR STANDARD

REGULUS - system Radiators



TABLE OF SAMPLE HEATERS

TYPE	RATING WATTS			WATER CAPACITY	WIDTH (mm)	HEIGHT (mm)	DEPTH (mm)	WEIGHT (kg)
	85/75/20	75/65/20	55/45/20					
R6/040 RD6/040	519	431	254	0,45	400	575	90	3,70
R6/060 RD6/060	1000	829	490	0,59	600	575	90	5,20
R6/080 RD6/080	1443	1196	707	0,73	800	575	90	6,70
R6/100 RD6/100	1919	1590	940	0,90	1000	575	90	8,30
R6/120 RD6/120	2448	2029	1199	0,99	1200	575	90	9,80
R6/140 RD6/140	3011	2496	1475	1,19	1400	575	90	10,70
R6/160 RD6/160	3564	2954	1746	1,31	1600	575	90	12,70
R6/180 RD6/180	3986	3304	1952	1,60	1800	575	90	13,20
R6/200 RD6/200	4431	3672	2170	2,03	2000	575	90	14,60

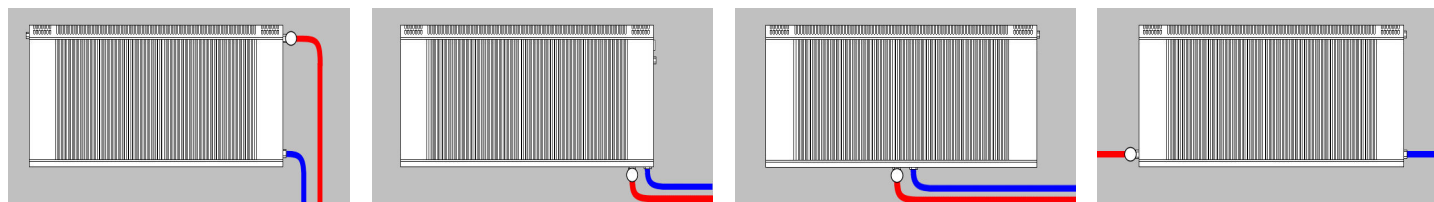

UNIQUE CONCEPT - OUR STANDARD

REGULUS-system
43-300 Bielsko-Biala
Dworkowa str. 2
REPUBLIC OF POLAND

Tel.: +48 33 815 10 25, +48 33 812 36 69
Fax.: +48 33 496 99 99
Mail: regulus@regulus.com.pl
Web: www.regulus.com.pl